

For Hydraulics

HSP Cupla

For hydraulic pressure from 14.0 to 20.6MPa {142~210kgf/cm²}

Working pressure


20.6 20.6MPa (210kgf/cm ²)	18.0 18.0MPa (183kgf/cm ²)	14.0 14.0MPa (142kgf/cm ²)
---	---	---

Valve structure

Two-way shut-off

Applicable fluids

Hydraulic oil

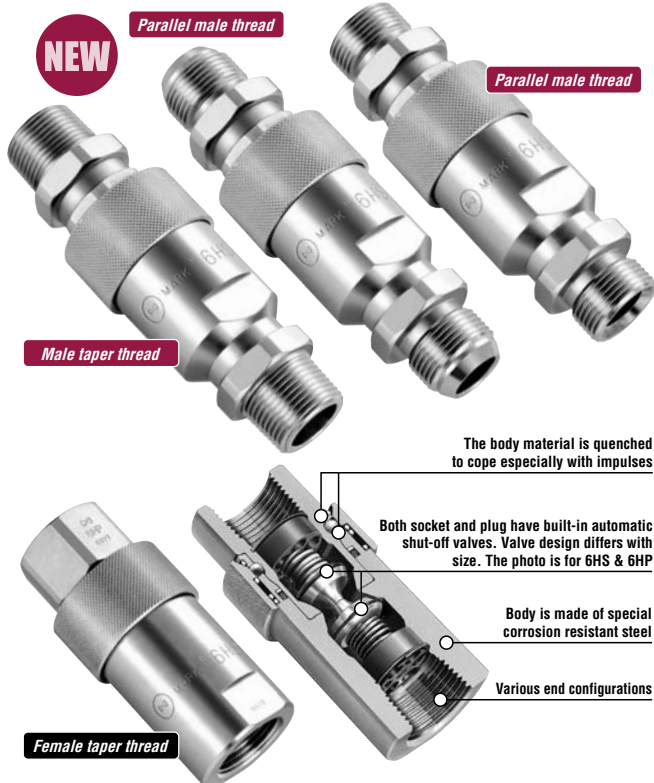

Special steel body is tough against vibration and impact! Male and female thread end configurations are available. Low pressure loss characteristic suits hydraulic equipment applications.

- Quenched special steel body!
Powerful impact resistance, especially against impulses.
- Valve is designed to suppress pressure loss, particularly suitable for hydraulic applications which need big fluid flow rates.
- Automatic shut-off valves in both socket and plug prevent fluid spill out on disconnection. Easy to handle.
- In addition to conventional female thread type, male thread types (male taper thread, parallel male thread with 30° flare, and parallel male thread with 30° cone-seat) are newly added. Male thread types are designed especially for direct connection to hydraulic power units effectively.
- Parallel male thread type complies with both metal seal and O-ring seal. (In case of O-ring seal, O-rings available in the market can be used.)
- HSP-DC Cuplas are available for diecasting machine applications with severe pressure variation.
- The overall length of male thread type is shorter than that of female thread type plus conversion nipple available in the market.

Specifications			
Body material	Special steel (Nickel-plated)		
Size	1/4" • 3/8" • 1/2" • 3/4" • 1"	1 1/4" • 1 1/2"	2"
Working pressure MPa (kgf/cm ²)	20.6 (210)	18.0 (183)	14.0 (142)
Pressure resistance MPa (kgf/cm ²)	31.0 (316)	26.5 (270)	20.6 (210)
Seal material	Seal material	Mark	Working temperature range
	Nitrile rubber	NBR (SG)	-20°C~+80°C
	Fluoro rubber	FKM (X-100)	-20°C~+180°C
Working temperature range			Remarks
			Standard material
			Available on request

Max. Tightening Torque		N·m (kgf·cm)							
Size		1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Torque	Female thread	28 (286)	45 (459)	90 (918)	100 (1020)	180 (1836)	290 (2958)	350 (3570)	500 (5100)
	Male taper thread	28 (286)	45 (459)	90 (918)	100 (1020)	—	—	—	—
	Parallel male thread	25 (255)	35 (357)	60 (612)	120 (1224)	—	—	—	—

Flow Direction

Fluid may flow in either direction from plug or from socket side when coupled.

Interchangeability

4HSP with 6HSP or 10HSP with 12HSP can be connected each other. Other combinations of different sizes are not connectable.


Min. Cross-Sectional Area		(mm ²)								
Model		2HSP	3HSP	4HSP	6HSP	66HSP	8HSP	10HSP	12HSP	16HSP
Min. Cross-Sectional Area		21	37	77	77	145	203	595	595	1084

Suitability for Vacuum		1.3 x 10 ⁻¹ Pa {1 x 10 ⁻³ mmHg}		
Socket only	Plug only	When connected		
—	—	Operational		

Admixture of Air on Connection		(mℓ)								
Model		2HSP	3HSP	4HSP	6HSP	66HSP	8HSP	10HSP	12HSP	16HSP
Volume of air		0.7	1.9	3.5	3.5	8.2	12.4	44	44	156


Flow Rate – Pressure Loss Characteristics

[Test conditions] • Fluid : Hydraulic oil • Temperature : 30°C ± 5°C
• Fluid viscosity : 32 x 10⁻⁶m²/s • Density : 0.87 x 10³kg/m³

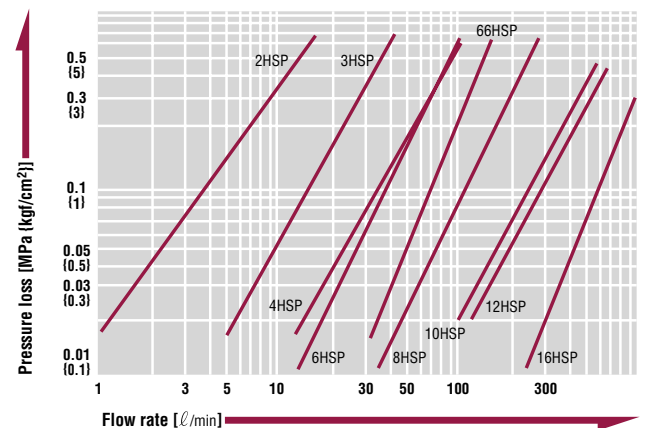


The flow volume of male thread type is increased by 5~10% compared with that of female thread type with conversion nipple.

Plug HP type (Female thread)

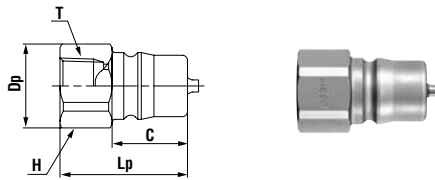

Model	Application	Mass (g)	Dimensions (mm)				
			Lp	σDp	C	H(WAF)	T
2HP	R 1/4	40	32	20.5	17.5	Hex.19	Rc 1/4
3HP	R 3/8	68	38	25	22.5	Hex.23	Rc 3/8
4HP	R 1/2	124	44	32	27.5	Hex.29	Rc 1/2
6HP	R 3/4	148	50	35	27.5	Hex.32	Rc 3/4
66HP	R 3/4	232	51	40	28	Two flats 35	Rc 3/4
8HP	R 1	361	61	47	36	Two flats 41	Rc 1
10HP	R1 1/4	886	80	64	58	Two flats 58	Rc1 1/4
12HP	R1 1/2	810	80	64	58	Two flats 58	Rc1 1/2
16HP	R 2	1513	115	100	83	Two flats 90	Rc 2


Socket HS type (Female thread)

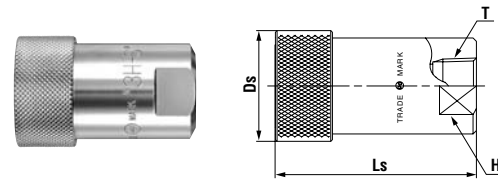

Model	Application	Mass (g)	Dimensions (mm)			
			Ls	σDs	H(WAF)	T
2HS	R 1/4	134	49	27.5	Two flats 19	Rc 1/4
3HS	R 3/8	226	60	33	Two flats 23	Rc 3/8
4HS	R 1/2	485	72	43	Two flats 35	Rc 1/2
6HS	R 3/4	460	72	43	Two flats 35	Rc 3/4
66HS	R 3/4	569	78.5	47	Two flats 35	Rc 3/4
8HS	R 1	1042	93	58	Two flats 46	Rc 1
10HS	R1 1/4	2586	138	87	Two flats 58	Rc1 1/4
12HS	R1 1/2	2510	138	87	Two flats 58	Rc1 1/2
16HS	R 2	3699	198	123	Two flats 80	Rc 2

Plug HP-R type (Male thread)


NEW

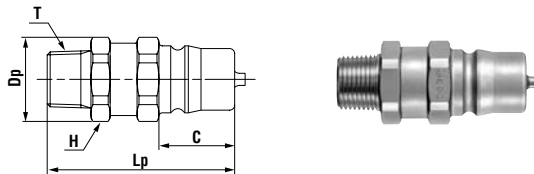

Model	Application	Mass (g)	Dimensions (mm)				
			Lp	σDp	C	H(WAF)	T
2HP-R	Rc 1/4	60	49	21	17.5	Hex.19	R 1/4
3HP-R	Rc 3/8	102	55.5	25	22.5	Hex.23	R 3/8
4HP-R	Rc 1/2	171	63	31	27.5	Hex.29	R 1/2
6HP-R	Rc 3/4	197	66	35	27.5	Hex.32	R 3/4

Socket HS-R type (Male thread)


NEW

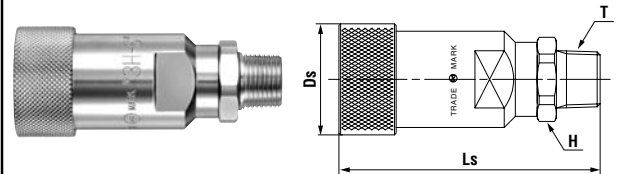

Model	Application	Mass (g)	Dimensions (mm)			
			Ls	σDs	H(WAF)	T
2HS-R	Rc 1/4	148	66	27.5	Hex.19	R 1/4
3HS-R	Rc 3/8	245	77.5	33	Hex.23	R 3/8
4HS-R	Rc 1/2	466	90	43	Hex.29	R 1/2
6HS-R	Rc 3/4	493	93	43	Hex.32	R 3/4

Plug HP-GP type (Parallel male thread with 30° flare)


NEW

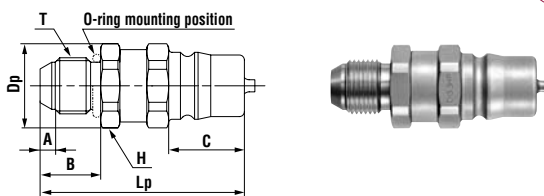

Model	Application*	Mass (g)	O-ring size	Dimensions (mm)					H(WAF)	T
				Lp	σDp	A	B	C		
2HP-GP	G 1/4	62	P-11	52.5	21	4.5	16	17.5	Hex.19	G 1/4B
3HP-GP	G 3/8	103	P-14	60.5	25	4.5	18	22.5	Hex.23	G 3/8B
4HP-GP	G 1/2	173	P-18	66	31	5.5	20	27.5	Hex.29	G 1/2B
6HP-GP	G 3/4	203	P-24	69	35	5.5	22	27.5	Hex.32	G 3/4B

Socket HS-GP type (Parallel male thread with 30° flare)


NEW

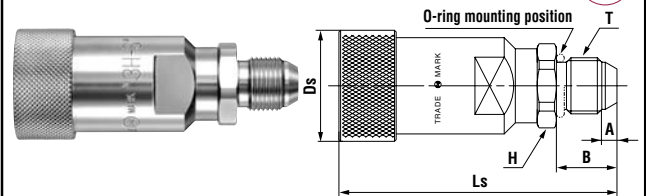

Model	Application*	Mass (g)	O-ring size	Dimensions (mm)					H(WAF)	T
				Ls	σDs	A	B	C		
2HS-GP	G 1/4	149	P-11	69.5	27.5	4.5	16	Hex.19	G 1/4B	
3HS-GP	G 3/8	246	P-14	82.5	33	4.5	18	Hex.23	G 3/8B	
4HS-GP	G 1/2	476	P-18	93	43	5.5	20	Hex.29	G 1/2B	
6HS-GP	G 3/4	498	P-24	96	43	5.5	22	Hex.32	G 3/4B	

Plug HP-GS type (Parallel male thread with 30° cone-seat)


NEW

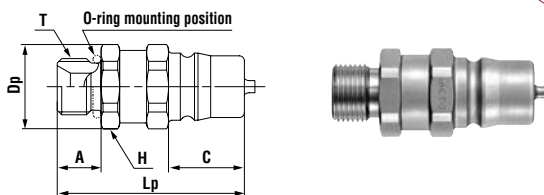

Model	Application*	Mass (g)	O-ring size	Dimensions (mm)					H(WAF)	T
				Lp	σDp	A	C	H(WAF)		
2HP-GS	G 1/4	59	P-11	48	21	11.5	17.5	Hex.19	G 1/4B	
3HP-GS	G 3/8	99	P-14	55.5	25	13	22.5	Hex.23	G 3/8B	
4HP-GS	G 1/2	167	P-18	60.5	31	14.5	27.5	Hex.29	G 1/2B	
6HP-GS	G 3/4	191	P-24	63.5	35	16.5	27.5	Hex.32	G 3/4B	

Socket HS-GS type (Parallel male thread with 30° cone-seat)

NEW

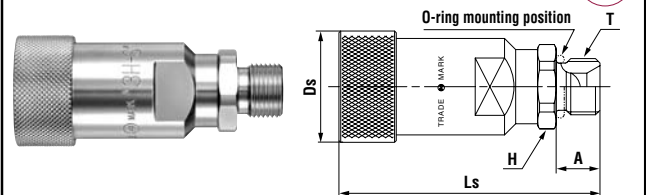

Model	Application*	Mass (g)	O-ring size	Dimensions (mm)					H(WAF)	T
				Ls	σDs	A	H(WAF)	T		
2HS-GS	G 1/4	146	P-11	65	27.5	11.5	Hex.19	G 1/4B		
3HS-GS	G 3/8	242	P-14	77.5	33	13	Hex.23	G 3/8B		
4HS-GS	G 1/2	469	P-18	87.5	43	14.5	Hex.29	G 1/2B		
6HS-GS	G 3/4	485	P-24	90.5	43	16.5	Hex.32	G 3/4B		

*The counterpart of GP type must be the parallel female thread specified in JIS B 8363 with 30° cone-seat or the coupling with O-ring seal. The counterpart of GS type must be the parallel female thread JIS B 8363 with 30° flare or the coupling with O-ring seal.